



Plumbing & Drainage

StormCrate55

Stormwater Retention, Attenuation & Infiltration Crate



- Cellular stormwater crate
- 4 crates per 1m³ storage capacity
- Lightweight and easy to install
- High strength crate with load bearing of 562kN per m²
- Cost-effective and space saving



Plumbing & Drainage



Stormwater Management

Brett Martin's StormCrate55 modular cellular crates are used in storm water retention, attenuation and infiltration applications. The crates are designed to be simply and easily stacked together to create a below ground storm water holding tank or to allow the infiltration of storm water into the ground around them. The void created by the crates can then fill up with storm water during heavy rainfall conditions. The collected storm water then drains away slowly into the drainage system when the crate is used for attenuation, or, soaks away slowly into ground water table when the crate is used for infiltration. Extensive use of this type of storm water attenuation/ infiltration module has helped relieve pressure on conventional surface water drainage systems in line with the Sustainable Urban Drainage Systems (SUDS) program advocated by the Environment Agency.

Benefits

- StormCrate55 provide a highly effective means of managing storm water, contributing to reducing the risk of flooding.
- Rainwater Infiltration: StormCrate55 can be wrapped in a geotextile which allows stored water to slowly seep into the surrounding ground and back into the water table.
- Rainwater Attenuation: another common practice is to surround StormCrate55 with an impermeable geomembrane to create a sealed underground tank. The outlet from this tank is then controlled to facilitate a slow release of the stored water back into the drainage system over a longer period.

PROPERTIES	VALUE	
PHYSICAL PROPERTIES		
Volume	0.25m³	
Cube Storage Volume	0.2375m³	
Void Ratio	95%	
Dimensions	1200mm x 600mm x 347mm	
Connections	12 x pipe inlets	
Weight	15.5kg	
Material	Polypropylene	
STRENGTH	VERTICAL	LATERAL
Short Term Strength	562kN/m²	70kN/m²
Long term Strength	153kN/m²	19kN/m²


STORM WATER CAPACITY

- The volume of each crate is 0.25m³ with a 95% void ratio. Due to the modular nature of StormCrate55 the system can be scaled appropriately depending on the size of installation, for example 16 StormCrate55 are required for a 4m³ installation.
- The cellular structure of StormCrate55 maximises water holding capabilities with its 95% void ratio meaning that each crate can store up to 237.5L or 0.2375m³ of storm water.




QUICK & EASY TO INSTALL

- Comprising modular units, StormCrate55 are quick and easy to install.
- Weighing in at only 15.5kg per module, StormCrate55 can be easily lifted and set in place by hand without the need for heavy lifting equipment on site.
- The shallow installation depths required for StormCrate55 means less ground working and site spoil.
- The individual modules are joined using connectors and shear pins in a brick bond pattern, a very simple but effective jointing method, which allows crates to fit together quickly and with ease providing stability in both vertical and horizontal planes.



MODULAR DESIGN

StormCrate55 are designed to be easily laid in a brick bond pattern.

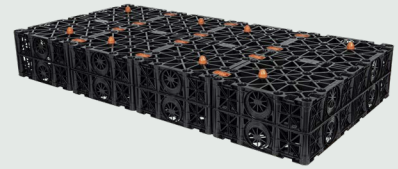

EASY CONNECTION

StormCrate55 fit quickly and simply together with four connectors and two shear pins per crate.



QUICK AND EASY TO INSTALL

At only 15.5kg per module, StormCrate55 are easily lifted by hand.




STORM WATER MANAGEMENT

StormCrate55 steadily disperse high intensity storm water by infiltration or attenuation. Each crate has a capacity of 237.5L or 0.2375m³

HIGH PERFORMANCE LOADING

StormCrate55 have a load bearing design of up to 562kN per m²



COMPONENTS

STORMCRATE55

Code B8250



SHEAR PIN CONNECTOR

Code B8252 (2 INCLUDED)




STORMCRATE55 CONNECTOR

Code B8251 (4 INCLUDED)




PRODUCT DIMENSIONS

SIDE VIEW

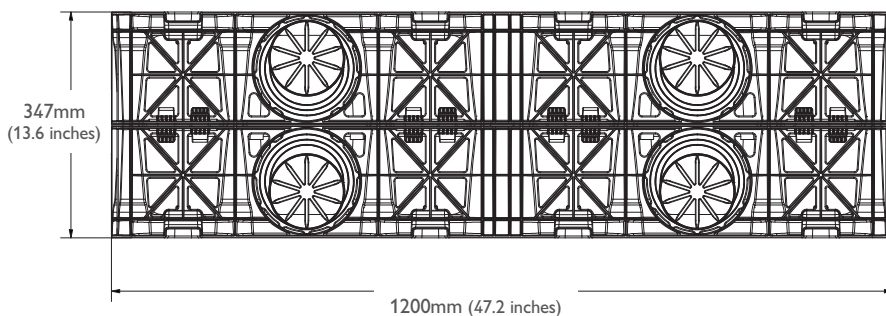

FRONT VIEW

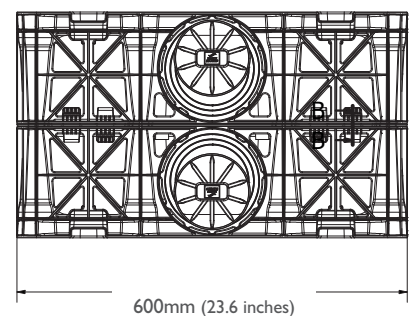



Plumbing & Drainage

Ireland

24 Roughfort Road
Mallusk, Co. Antrim
Northern Ireland, BT36 4RB
Tel: 028 9084 9999
Fax: 028 9083 6666
Sales Counter: 028 9084 8999
Email: sales@brettmartin.com

England & Wales

Speedwell Ind. Estate
Staveley, Derbyshire
England S43 3JP
Tel: 01246 280000
Fax: 01246 280001
Email: building@brettmartin.com

100 Camford Way
Sundon Park
Luton, Bedfordshire
England, LU3 3AN
Tel: 01246 280000
Fax: 01246 280001
Email: building@brettmartin.com

Scotland

Blairlinn Road
Cumbernauld, Glasgow
Scotland, G67 2TF
Tel: 01236 725536
Fax: 01236 725871
Email: scotland@brettmartin.com

For the latest company information
visit the company's website:
www.brettmartin.com



All reasonable care has been taken in the compilation of the information contained within this literature. All recommendations on the use of our products are made without guarantee as conditions of use are beyond the control of Brett Martin. It is the customer's responsibility to ensure that the product is fit for its intended purpose and that the actual conditions of use are suitable. Brett Martin pursues a policy of continuous product development and reserves the right to amend specifications without prior notice. StormCrate55 is a registered trademark of Brett Martin Ltd. Brett Martin Ltd.'s Normal Conditions of Sale apply.